

FortiGate[®] Voice-80C

Integrated Multi-Threat Security and PBX

Integrated Business Gateway

The FortiGate Voice-80C is a multi-function, multi-threat security platform that connects and protects remote and branch offices. It combines the functionality of a multi-threat security gateway, VoIP gateway, IP PBX, router and switch into a single, integrated device.

The FortiGate Voice-80C meets the needs of small, medium, or branch offices to do more without spending more. It delivers integrated data security, VoIP support, and a full-featured PBX, all managed by a single console. By integrating all three technologies, the FortiGate Voice-80C lowers the cost and time required to configure and manage your network security, VoIP security, and PBX functionality.

Comprehensive Threat Protection

The FortiGate Voice-80C provides comprehensive threat protection with Fortinet's unmatched range of enterprise-grade security technologies:

| | | |
|-----------------------|----------------------|------------------------|
| Antispam | Dynamic routing | IPSec VPN |
| Antivirus/antimalware | Endpoint NAC | SSL VPN |
| Application control | Firewall | SSL traffic inspection |
| Data loss prevention | Intrusion prevention | Web filtering |

Deployment Flexibility

The eight ports on the FortiGate Voice-80C platform give you the flexibility you need to create multiple security zones for various departments, users, access methods, and devices. The FortiASIC Content Processor provides acceleration for content-intensive security technologies, such as antivirus/antispymware, ensuring that your security technology does not affect your application and network performance.

Industry Certification

The four ICSA Labs-certified inspection technologies ensure the industry's best protection and specifically address many of the requirements put forth by industry and government agencies, such as PCI DSS. ICSA Labs provides industry-recognized credible, independent, 3rd party product assurance for end- users and enterprises.



The FortiGate Product Family: Integrated Multi-Threat Protection

The FortiGate product family provides cost-effective, comprehensive protection against network, content, and application-level threats. It defends your environment from complex, sophisticated attacks without degrading network availability and affecting application performance.

FortiGate platforms combine the purpose-built FortiOS[™] security operating system with custom FortiASIC processors and other hardware to provide a comprehensive and high-performance array of security and networking functions.

The FortiGate product family delivers the highest level of network, content, and application security for enterprises of all sizes, while reducing total cost of ownership. With Fortinet, you deploy the network security you need to protect your intellectual property, preserve the privacy of critical customer information, and maintain regulatory compliance.

Features

Benefits


| | |
|---|---|
| Integrated data and VoIP security and IP-PBX | Enables small and medium businesses, and ROBOs of larger organizations to deploy enterprise-grade voice and data security. |
| High-performance custom hardware | FortiASIC-CP6, the latest generation of FortiASIC, accelerates multi-threat functions to ensure security is never a bottleneck. |
| Single device reduces costs | Manages all security and PBX functionality from a single console, lowering costs and reducing deployment challenges. |
| Integrated multi-port switch | Eliminates the need for external switches, and provides enhanced connectivity options. |

Industry Certification



| Technical Specifications | | FortiGate Voice-80C | |
|--|---|---------------------|--|
| Hardware Specifications | | | |
| 10/100/1000 WAN Interfaces (Copper, RJ-45) | 2 | | |
| 10/100 Switch Interfaces (Copper, RJ-45) | 8 | | |
| FXO Interfaces | 4 | | |
| Console (Copper, RJ-45) | 1 | | |
| USB Interfaces | 2 | | |
| Operating System | Hardened FortiGate OS | | |
| System Performance | | | |
| Firewall Throughput (1518 byte UDP packets) | 1 Gbps | | |
| Firewall Throughput (512 byte UDP packets) | 500 Mbps | | |
| IPSec VPN Throughput | 100 Mbps | | |
| IPS Throughput* | 200 Mbps | | |
| Antivirus Throughput* | 65 Mbps | | |
| Gateway-to-Gateway IPSec VPN Tunnels (System / VDOM) | 500 / 50 | | |
| Client-to-Gateway IPSec VPN Tunnels | 1,500 | | |
| Concurrent Sessions | 400,000 | | |
| New Sessions/Sec | 10,000 | | |
| Concurrent SSL-VPN Users (Recommended Max) | 100 | | |
| SSL-VPN Throughput | 70 Mbps | | |
| Firewall Policies (Max) | 4,000 | | |
| Virtual Domains (Max / Default) | 10 / 10 | | |
| Maximum Number of Policies (System / VDOM) | 5,000 / 500 | | |
| Unlimited User Licenses | Yes | | |
| Dimensions | | | |
| Height | 1.75 in (4.45 cm) | | |
| Width | 13.5 in (34.29 cm) | | |
| Length | 8.75 in (22.23 cm) | | |
| Weight | 4 lbs (1.81 kg) | | |
| Rack Mountable | No | | |
| Environment | | | |
| Power Required | 100-240 VAC, 50-60 Hz, 2 Amp max | | |
| Power Consumption (AVG) | 36W | | |
| Heat Dissipation | 123 BTU | | |
| Operating Temperature | 32 – 104 deg F (0 – 40 deg C) | | |
| Storage Temperature | -13 to 158 deg F (-25 to 70 deg C) | | |
| Humidity | 5 to 95% non-condensing | | |
| Compliance | | | |
| | FCC Class B, UL/CUL/ VCCI/C-tick, CE | | |
| Certifications | | | |
| | ICSA Labs: Firewall, Antivirus, IPSec VPN, Intrusion Prevention | | |

| PBX Features | | FortiGate Voice-80C | |
|--|---|---------------------|--|
| Maximum Number of Registered SIP User Agents | 50 | | |
| Number of SIP Clients Registering per Second | 50 | | |
| Maximum Number of Concurrent Calls | 20 | | |
| Maximum Number of Call Attempts per Second | 5 | | |
| Conference Lines | 5 | | |
| Voice Mail Storage | Approximately 60 hours | | |
| VoIP Protocol | SIP v2 (RFC3261), RTP/RTC | | |
| Voice Codec | G.711.a/u | | |
| IP Telephony Features | Echo cancellation G.168 | | |
| FortiFone-100 | | | |
| Hardware Specifications | | | |
| 10/100 LAN Interface (Copper, RJ-45) | 1 | | |
| 10/100 PC Interface (Copper, RJ-45) | 1 | | |
| LCD Display | 2 x 16 Characters | | |
| Speaker | Full duplex hands-free | | |
| Features | 3-Way Conference Call, Call Detail Records, Call Transfer, Call Waiting, Caller ID, Dial Plan, DID, Do Not Disturb, Extensions, Group, IVR/ Auto-attendant, MeetMe Conference, Music-on-hold, Session Monitor, Voice Mail with Email Notification | | |

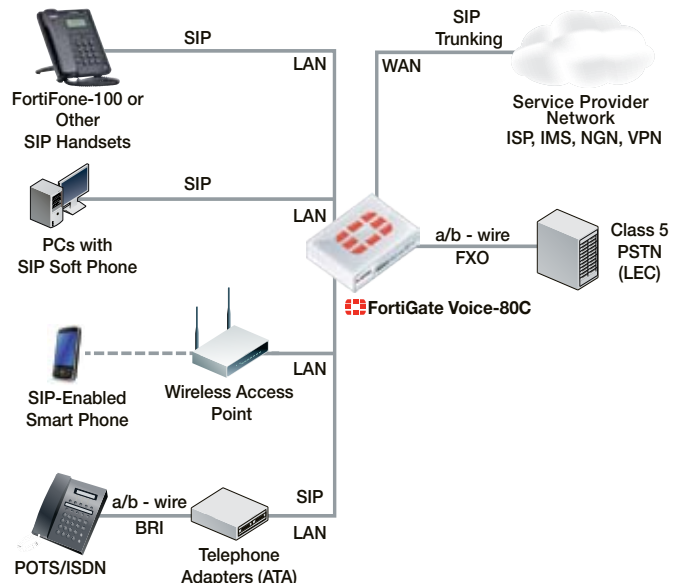

FortiGate Voice-80C Voice Network

*Antivirus performance is measured based on HTTP traffic with 32 Kbyte file attachments and IPS performance is measured based on UDP traffic with 512 byte packet size. Actual performance may vary depending on network traffic and environments.

FortiGuard® Security Subscription Services deliver dynamic, automated updates for Fortinet products. The Fortinet Global Security Research Team creates these updates to ensure up-to-date protection against sophisticated threats. Subscriptions include antivirus, intrusion prevention, web filtering, antispam, vulnerability and compliance management, application control, and database security services.

FortiCare™ Support Services provide global support for all Fortinet products and services. FortiCare support enables your Fortinet products to perform optimally. Support plans start with 8x5 Enhanced Support with “return and replace” hardware replacement or 24x7 Comprehensive Support with advanced replacement. Options include Premium Support, Premium RMA, and Professional Services. All hardware products include a 1-year limited hardware warranty and 90-day limited software warranty.

GLOBAL HEADQUARTERS

Fortinet Incorporated
1090 Kifer Road, Sunnyvale, CA 94086 USA
Tel +1.408.235.7700
Fax +1.408.235.7737
www.fortinet.com/sales

EMEA SALES OFFICE – FRANCE

Fortinet Incorporated
120 rue Albert Caquot
06560, Sophia Antipolis, France
Tel +33.4.8987.0510
Fax +33.4.8987.0501

APAC SALES OFFICE – SINGAPORE

Fortinet Incorporated
300 Beach Road 20-01 The Concourse
Singapore 199555
Tel: +65-6513-3730
Fax: +65-6223-6784



Copyright© 2011 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, and FortiGuard® are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance metrics contained herein were attained in internal lab tests under ideal conditions, and performance may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's General Counsel, with a purchaser that expressly warrants that the identified product will perform according to the performance metrics herein. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any guarantees. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable. Certain Fortinet products are licensed under U.S. Patent No. 5,623,600.